


125W Portable Solar Charger

The **P3-125** is a **Military grade Solar Charger** derived from years of supporting troops in the battlefield. The P3-125 has been tested to the MIL-STD-810 series of tests and has been approved for deployment in austere operating environments. At 38.5w/pound, the P3-125 enables manpack applications requiring lightweight, flexible, and reliable power.

P3-125W Product Specifications


Electrical Characteristics @ STC*	
Rated Power (watts)	150
Rated Voltage at MPP (VDC)	31
Rated Current at MPP (amp)	4.8
Open Circuit Voltage (volts)	39
Short Circuit Current (amps)	5.6
Physical Characteristics	
Folded Dimensions, mm	261 x 318 x 45
Folded Dimensions, inches	10.25 x 12.5 x 1.75
Deployed Dimensions, mm	1619 x 1006 x 1.0
Deployed Dimensions, inches	63.75x 39.625 x 0.04
Max. Deployed Thickness at J-Box, mm (in.)	12 (0.5)
Weight, kg(lb)	1.48 (3.25)
Power to Weight Ratio, watt/kg(watt/lb)	84.5 (38.5)
Thermal Characteristics	
Temperature Coefficient for Power (%/°C)	-0.43
Temperature Coefficient for Voltage (%/°C)	-0.38
Temperature Coefficient for Voc (%/°C)	-0.33
Temperature Coefficient for Isc (%/°C)	-0.03
Cell Temperature Operating Range (°C)	-40 to 85
Voltage, Open Circuit @ -40°C (volts)	56
Voltage, Vmpp @ 50°C (volts)	29.7
Voltage, Vmpp @ 75°C (volts)	26.75

*Electrical Characteristics- tested at Standard Test Conditions (STC): irradiance level 1000W/m2, spectrum AM 1.5 and cell temperature 25° C. Tolerance +/-15%. The performance of this product may increase by up to ~5% after the first several hours of exposure to sunlight.

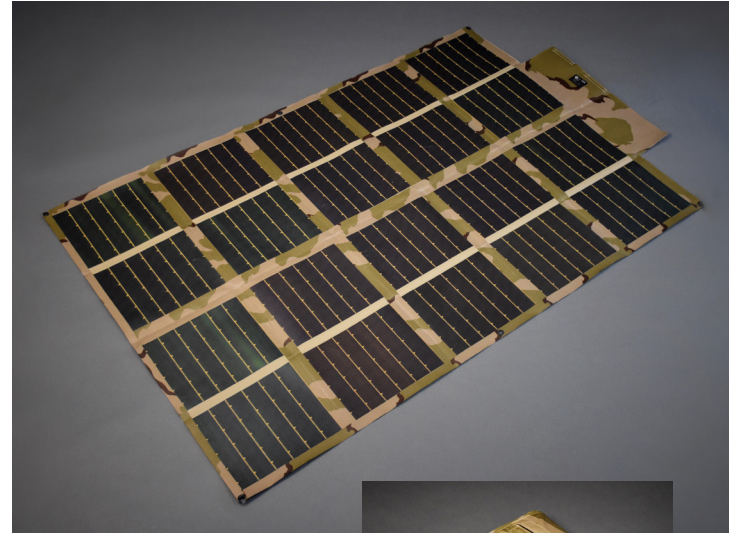

Dessert Camo
PN 18041


Also available in:




Woodland Camo
PN 18042



Black
PN 18045



Multicam
PN 18046

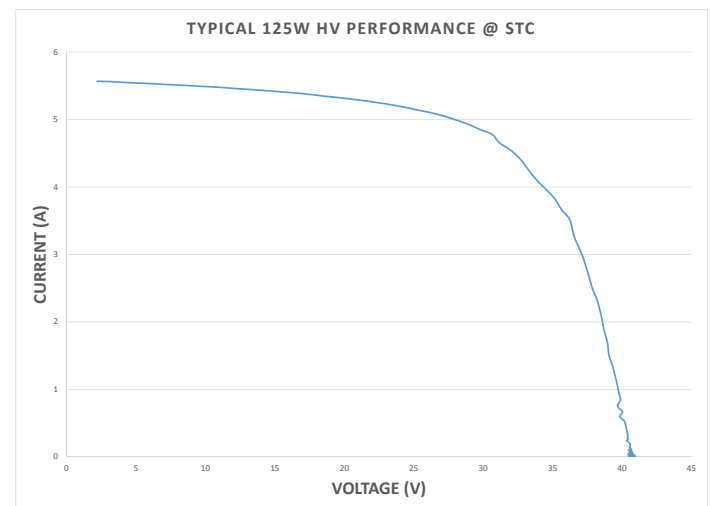

2631 S Friebus Ave. Suite 11
Tucson, AZ 85713 USA
520-775-1390
sales@p3solar.com